


## IRE & RKBI AKUSTİK İZOLELİ KANAL TİPİ FANLAR IRE & RKBI ACOUSTIC INSULATED DUCT TYPE FANS

- 50 mm kalınlıkta cam yünü ile akustik izolasyon sayesinde minimum ses seviyesi
- IRE modeller yuvarlak bağlantılı, öne eğik kanatlı
- RKBI modeller dikdörtgen bağlantılı, geriye eğik kanatlı
- Her açıda montaj imkanı
- Yüksek basınç, yüksek verim, minimum ses seviyesi
- Menteşeli bağlantı sayesinde kolay temizlik ve bakım imkanı
- % 0 - % 100 kapasite aralığında hız kontrol imkanı
- Monofaze modellerde termik korumalı, trifaze modellerde termik koruma uçlu B sınıfı, IP 44, bakım gerektirmeyen rulmanlı motor
- Low noise level with 50 mm thickness, acoustic insulation glass wool
- IRE models connections are circular with forward curved blades
- RKBI models connections are rectangular with backward curved blades
- Can be mounted in all angles
- High pressure, high efficiency, minimum sound level
- Easy service and cleaning with the hinged connection
- In the range of 0 to 100% capacity control
- Single phase models are thermic protected with three phase models thermic protection is class B, IP 44, and maintenance-free bearing motor

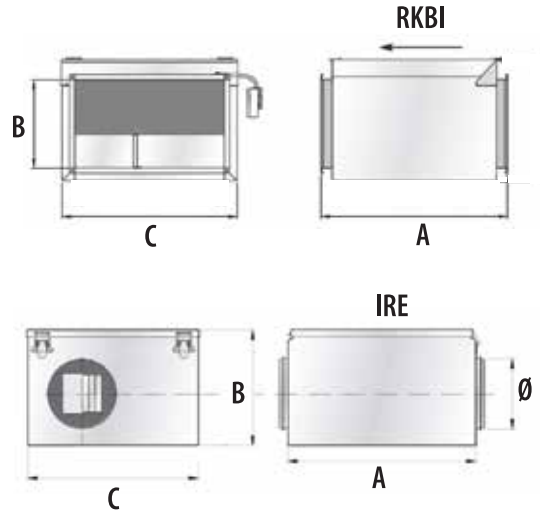

MODEL	IRE 160D	IRE 200C	IRE 250C	IRE 250D	IRE 315B	RKBI 600x350 D1	RKBI 700x400 E1	RKBI 800x500 B1	RKBI 800x500 K3	RKBI 1000x500 L3
A	400	400	400	580	650	747	817	942	942	1047
B	265	330	342	342	397	489	549	649	649	649
C	365	364	468	525	586	707	807	907	907	1105
Bağlantı Connection	160	200	250	250	315	600x350	700x400	800x500	800x500	1000x500
Voltaaj [V] Voltage	230	230	230	230	230	230	230	230	400	400
Akım [A] Current	0.68	0.83	1.13	1.72	3.00	2.46	3.30	4.44	3.69	4.90
Güç [W] Power	157	188	256	378	620	515	731	867	1,715	2,455
Devir [d/dk] rpm	2200	1800	2120	1,300	1,330	1,370	1252	871	1,395	1,348
Maks. Sıc. [°C] Max. Temp.	55	55	50	70	60	40	50	40	55	50
Ses Seviyesi [dB(A)@3m] Sound Level	39	38	40	45	45	50	49	51	57	58
Ağırlık [kg] Weight	13	14	18	30	40	56	62.5	87	87	124
Hız Anahtarı Speed Cont.	VRS 1	VRS 1	VRS 1	VRTE 3	VRTE 3	VRTE 3	VRTE 5	VRTE 5	RTR 4	RTR 7

HAVA DEBİSİ (m<sup>3</sup>/h) / Air Flow

Statik Basınç (Pa) Static Pressure (Pa)	IRE 160D	IRE 200C	IRE 250C	IRE 250D	IRE 315B	RKBI 600x350 D1	RKBI 700x400 E1	RKBI 800x500 B1	RKBI 800x500 K3	RKBI 1000x500 L3
0	-					3,894	5,288	7,800	9,535	12,465
50	-		1,035	1,289		3,695	5,022	7,326	9,295	12,200
100	473		964	1,194	1,915	3,472	4,768	6,739	9,032	11,875
125	455	639	925	1,142	1,859	3,352	4,639	6,416	8,893	11,698
150	438	618	885	1,086	1,800	3,228	4,504	6,083	8,750	11,513
175	423	595	841	1,023	1,737	3,100	4,262	5,745	8,600	11,326
200	407	568	795	950	1,669	2,968	4,210	5,403	8,447	11,139
225	391	538	745	861	1,595	2,835	4,048	5,057	8,288	10,953
250	375	502	691	747	1,512	2,696	3,875	4,702	8,124	10,769
275	357	458	632	585	1,415	2,553	3,688	4,332	7,955	10,586
300	338	402	566	339	1,299	2,405	3,488	3,935	7,780	10,405
325	316	322	491		1,144	2,248	3,280	3,484	7,600	10,223
350	288	196	406		891	2,080	3,065	2,923	7,415	10,041
375	242	32	305		302	1,895	2,848	1,967	7,224	9,858
400	38		183			1,682	2,629	290	7,026	9,671
450	-					992	2,180		6,612	9,285
500	-						1,655		6,167	8,872
550	-						596		5,681	8,416
600	-								5,135	7,902
650	-								4,487	7,314
700	-								3,618	6,650
750	-								1,690	5,929
800	-									5,157
850	-									4,255
900	-									940

**AKSESUARLAR  
ACCESSORIES**

Sayfa/Page 141~145

