


KV KARE ÇERÇEVELİ KANAL TİPİ FANLAR KV SQUARE FRAMED WALL TYPE FANS

- Ø 100 - Ø 315 mm aralığında 6 farklı çap
- Kolay ve hızlı montaj ile yer ve işçilikten tasarruf
- Yüksek basınç ve verim sağlayan geriye eğik radyal kanatlar
- Nemli ortamlarda çalışma imkanı, IP 44 koruma sınıfı (Elektrik bağlantı kutusu IP 54)
- Otomatik termik korumalı, dıştan rotorlu, bakım gerektirmeyen rulmanlı, tek fazlı motor
- %0 - %100 kapasite aralığında hız kontrolü yapabilmeye imkanı

- In the range of 6 different diameter Ø 100 - Ø 315 mm
- Easy and quick installation and space saving fan
- High pressure and high efficiency backward curved centrifugal blades
- The opportunity to work in humid environments, protection class IP 44 (Electrical connection box IP 54)
- Automatic thermal protection, external rotor, maintenance free bearings, single phase motor
- In the range of speed control 0 to 100 % capacity

HAVA DEBİSİ (m³/h) / Air Flow

Statik [Pa] Static Pa	KV 100A	KV 125C	KV 160C	KV 200A	KV 200B	KV 250C	KV 315B	KV 315C
0	438	555	1,040	958	1,053	1,103	1,324	1,775
50	338	482	961	887	1,004	1,037	1,242	1,647
100	211	399	861	809	944	967	1,153	1,520
125	177	355	800	767	909	930	1,106	1,457
150	150	312	736	724	871	891	1,059	1,394
175	125	268	668	678	829	851	1,011	1,326
200	102	224	596	630	785	809	963	1,263
225	79	178	524	578	739	766	922	1,200
250	54	130	447	522	692	721	864	1,137
275	20	72	373	460	643	673	813	1,074
300			289	392	593	622	760	1,011
325			192	313	542	569	704	950
350			45	216	489	514	644	887
375				78	434	456	577	825
400					376	396	502	763
450					250	273	323	641
500					128	155	170	519
550					37	51	77	398
600								278
650								159

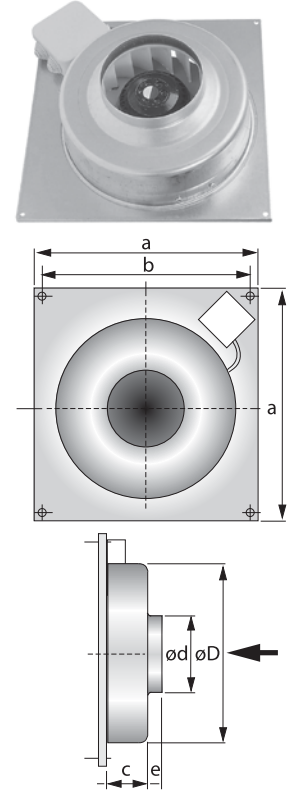

230V, 50 Hz	Akım Current (A)	Güç Power (W)	Devir Revolution (d/dk)	Maks. Sıc. Max. Temp. (°C)	Ses Seviyesi Sound Level dB(A)@3m	Ağırlık Weight (kg)	Ød	ØD	a	b	c	e	Hız Anahtarı Speed Controller
KV 100A	0.18	41	1.730	80	36	2,5	100	240	310	295	111	24	VRS 1
KV 125C	0.27	62	2.320	70	43	2,5	125	240	310	295	111	24	VRS 1
KV 160C	0.44	100	2.480	65	50	4,0	160	342	400	385	128	26	VRS 1
KV 200A	0.5	115	2.580	60	47	4,1	200	342	400	385	127	34	VRS 1
KV 200B	0.69	158	2.500	60	49	4,8	200	342	400	385	127	34	VRS 1
KV 250C	0.84	192	2.420	50	49	4,9	250	342	400	385	126	33	VRS 1
KV 315B	0.84	190	2.465	50	48	5,6	315	400	460	445	158	34	VRS 1
KV 315C	1.19	274	2.500	50	51	6,0	315	400	460	445	158	34	VRS 1

AKSESUARLAR ACCESSORIES

Sayfa/Page 141~145

