

HAVALANDIRMA KANALLARI / VENTILATION DUCTS




- Tam otomatik makinelerde üretim sayesinde hassas toleransa sahip ürünler,
- EPDM conta kullanımı ile mükemmel hava sızdırmazlığı (TSE prEN 12237),
- Özel kenet sistemi sayesinde yüksek mukavemet,
- 100 ~ 1600 mm çap aralığında geniş ürün yelpazesi,
- -30°C / +100°C sıcaklık dayanımı,
- +3000 Pa basınca kadar güvenli kullanım,
- Hızlı ve kolay kullanım,
- Galvaniz, paslanmaz veya alüminyum malzeme alternatifi

- Air ducts and fittings have tight tolerance, by production with full-automatic machines,
- The airtight system, by using EPDM rubber for sealing (TSE prEN 12237),
- High strength, by producing Spiral lock seam ducts,
- The wide range of products, with diameters between 100~1600 mm,
- Temperature resistant from -30°C to +100°C,
- Withstands positive pressure up to 3000 Pa,
- Fast and easy installation,
- For specific application, material alternatives; galvanized, aluminum, stainless steel



Standart Çaplar [mm] Standard Diameters [mm]

ø 100	ø 224	ø 400	ø 710
ø 125	ø 250	ø 450	ø 800
ø 150	ø 280	ø 500	ø 900
ø 160	ø 300	ø 560	ø 1000
ø 180	ø 315	ø 600	ø 1120
ø 200	ø 355	ø 630	ø 1250

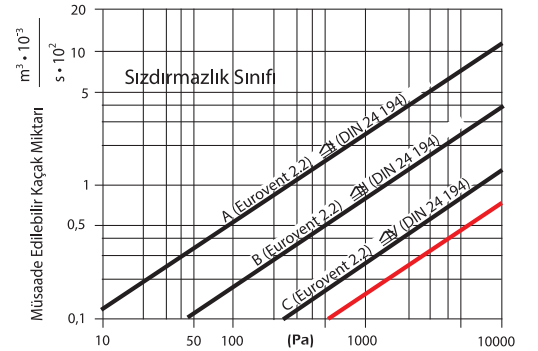

- SMACNA & DW 144 standartlarına uygun,
- Otomatik makinalarda hızlı ve düzgün imalat,
- Özel kanal flanşları ile minimum hava kaçağı (TSE prEN 1506),
- Otomatik makinalarda pittsburg kenet

- Meeting the requirements of standards SMACNA & DW 144,
- Fast and regular production with automatic machines,
- Minimum air leakage, by factory-fitted flanged systems (TSE prEN 1506),
- Producing Pittsburgh lock seam ducts on automatic machines